


S-1 音声制作車



<車体情報>

長さ:	8.740m
幅:	2.490m
車高:	3.190m
車両総重量	7955kg

<内装図>

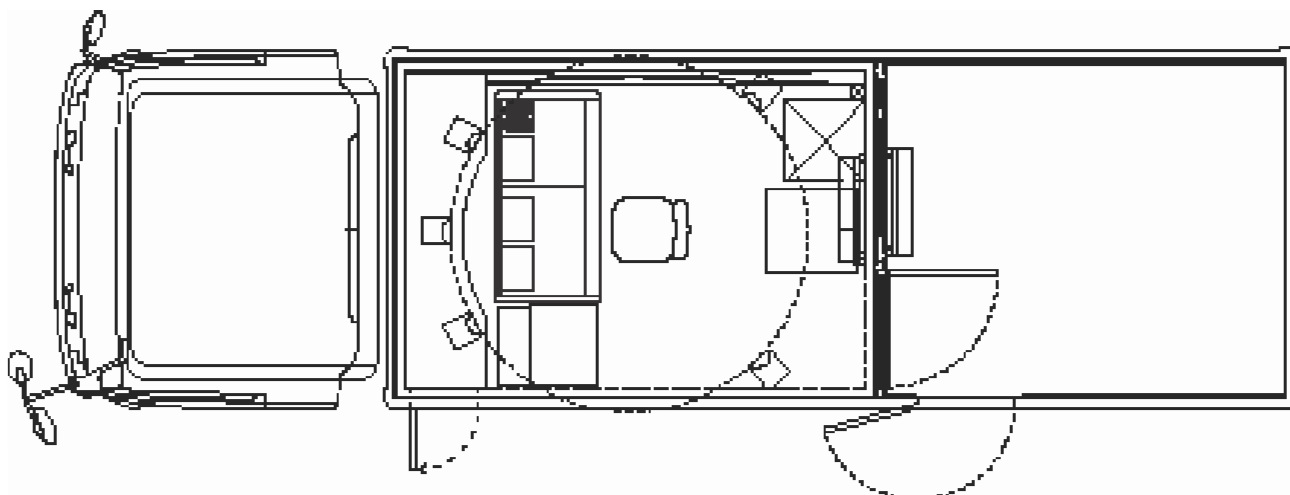

<電源>



100V or 200V 一括受電 カムロック入力
外部出力 平行15Aまで
1.5kW UPS x2 (Console/Network SW etc)
平均使用容量 35A程度 (エアコン2台使用時)

車内機器構成

Main Console : Calrec ArgoM(36 Fadors)		Sync	
DSP Hardware	Impulse1(Dual Core)	LEADER LT4670	Input:BB x1/GNSS x1
DSP Spec	Input:256ch	TASCAM CG-2000	For Word Clock Distribution
	BUS:96ch	Meters	
On Board Signal	Mic/Line Input:24ch	RTW TM9	AES x4/SDI x1
	Line Out:8ch	RTW TM3	AES x3
	AES Input:8ch (SRC ON)	YAMAKI YLM2022	AES x4/SDI x1
	AES Output:8ch	YAMAKI PVM-M1018S	Peak Meter AES x4
	GPI Input:8ch	FourBit MM-124D	VU Meter AES x2
Sub Console : Calrec ArgoM(24 Fadors)		Speakers	
DSP Hardware	Internal DSP(Single Core)	Left/Center/Right	Genelec 8341
DSP Spec	Input:128ch	Left/Right Surround	Genelec 8331
	BUS:96ch	LFE	Genelec 7350
On Board Signal	Mic/Line Input:24ch	Effectors	
	Line Out:16ch	Plug-In Processer	Fourier Audio Transform
	AES Input:8ch (SRC ON)	Multi Effector	TC Electronic System6000
	AES Output:8ch	Recorder/Player	
	MADI In/Out:64ch	CF Record/Play	TASCAM HS4000
Console Sharing I/O Box		SD card Player	DENON DN-F650R
I/O Modules	Mic/Line Input:24ch	Video/Monitor	
	Line Out:24ch	Video Router	BlackMagic Videohub 20x20
	MADI In/Out:64ch x2	Monitor	23 Inch x5
	Dante In/Out:64ch x2	Communications	
	SDI Input:6ch	ClearCom Unit	なんだっけ
	GPI Input:8ch		
AES I/O Box	AES Input:32ch		
	AES Output:32ch		
Stage Box I/O			
Analogue I/O Box	Mic/Line Input:48ch		
	Line Out:16ch		

車内写真

<制作ルーム>



<後室>

