


T-2 音声制作車



<車体情報>

長さ:	7.91m
幅:	2.49m
車高:	3.25m
車両総重量:	7.79t (中型)
※必要駐車スペース	
長さ:	約 12m
幅:	約 4.5m (各扉の開閉含む)

<内装図>

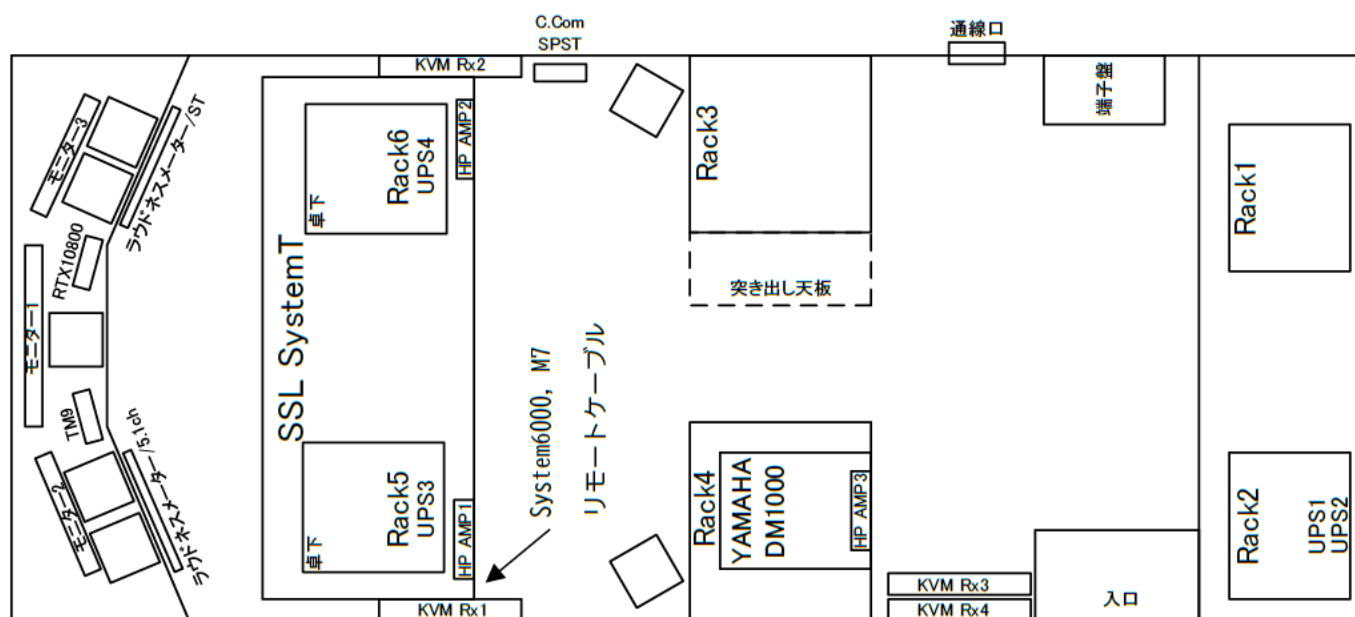

<電源>



6KVA(機器 3K 空調 3K)100V 1系統(カムロック)
 (アースは車両助手席側下にネジあり)
 ＊ステージボックス、別途 1KV

車内機器構成

【Main Console】

<u>Solid State Logic System T S500(TE2 Engine)</u>
SignalPath:600Path@48kHz/375path@96kHz 64 Faders w/Meter Bridge
IO Port
96 Mic/Line Input (StageBox 72ch + 車内 24ch) 64 Analog Line Input / 64 Analog Line Output 48 input/output Pairs of AES3 (96kHz) 30 input Pairs of AES3 48kHz / 40 output Pairs of AES3 (48kHz)

【Sub Console】

<u>YAMAHA DM1000/V2+ 2 Slot I/O</u>
16+1 Faders
IO Port
12 Mic Input 4 Analog Line Input / 12 Analog Line Output 16 input/output Pairs of AES3 (MY8-AE96S, MY8-AEB)

【Moduler I/O】

<u>Solid State Logic System T StageBox</u>
72 Mic/Line Input 8 Analog Line Output DANTE:SSL HC BRIDGE SRC/DANTE 256ch MADI:256ch@48kHz、128ch@96kHz ※設置スペース 幅 0.55m/奥行 0.65m/高さ 1m ※消費電力 約 1000W

【Audio Equipment】

<u>Speaker</u>
●STEREO/5.1.4 Immersive Monitor Speaker System Genelec 8340A×5, 8330A×4 (Hightlayer), 7360A×1 (LFE) GLM 4.2 Genelec loudspeaker Manager ●STEREO Monitor Speaker PMC PMC6
<u>Audio Recorder</u>
TASCAM HS-4000 (CF Recorder)×3

Sync Generator / Time Code Generator

Leader LT4611
ROSENDAHL Nanosyncs HD
BRAINSTORM DCD-24×2
ESE HD-488
BRAINSTORM SR-112
Timecode Display

Effector

tc electronic System6000, D-Two
Neve 33609/N
Solid State Logic THE BUS+
Tube Tech LCA-2B×2
GML 8900, 8200
Bricasti Design M7×2
EMPIRICAL LABS Distressor EL8-X (stereo pair)
Waves SoundGrid System
- Platinum Bundle
- IR360 Convolution Reverb
- H-Reverb Hybrid Reverb

Others

DirectOut Technologies MADI.BRIDGE
Clear-Com MS-702
Headphone Amp RUPERT NEVE DESIGNS RNHP×2
Audio Meter TM-9
VU meter, Peak meter, Phase scope, Loudness Meter
AC Power Cable (CAM-LOK Connectors) 20m

LCD

32"LCD Monitor 4K UHD / HD (12G-SDI Ready)
15.6"LCD Monitor 4K UHD / HD (12G-SDI Ready) ×2
Blackmagic Videohub 40x40 12G
KVM ATEN VE8900T/VE8900R

Option


AVID Pro Tools 128ch@48kHz/64ch@96kHz
TASCAM DA-6400×2 128ch@48kHz/64ch@96kHz
VIDEO DEVICES PIX 270i
SpinDigital MPEG-H 3D Audio(BaselineProfile level4)Live Encoder
KORG Live Extreme Encoder
ResoNetz Airfolc RA-6010-HPL HPL® バイノーラルプロセッサ

<制作ルーム>

前方



後方

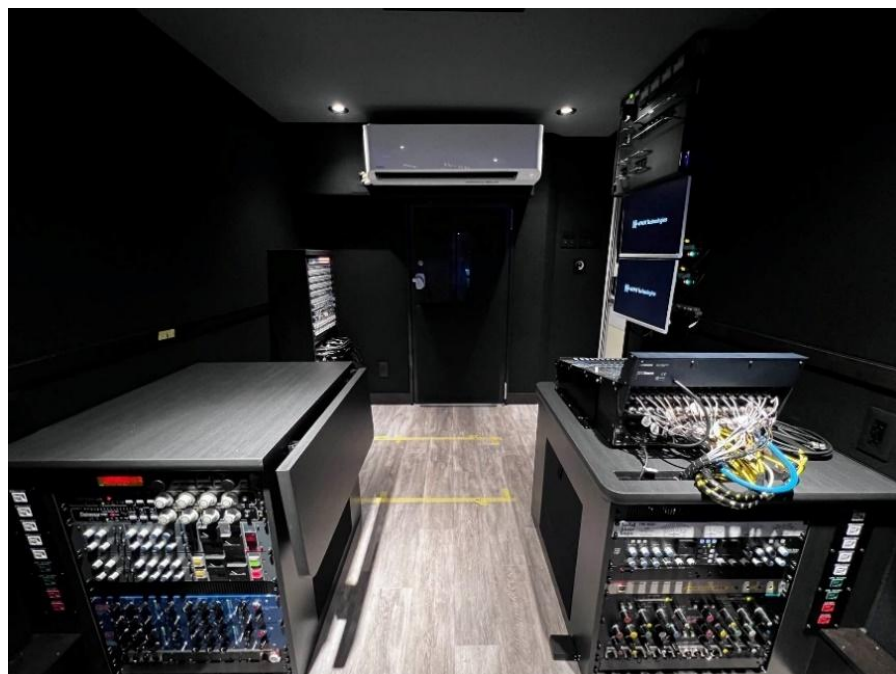

<エフェクトラック>

左前




右前



右後



<パッチ盤>

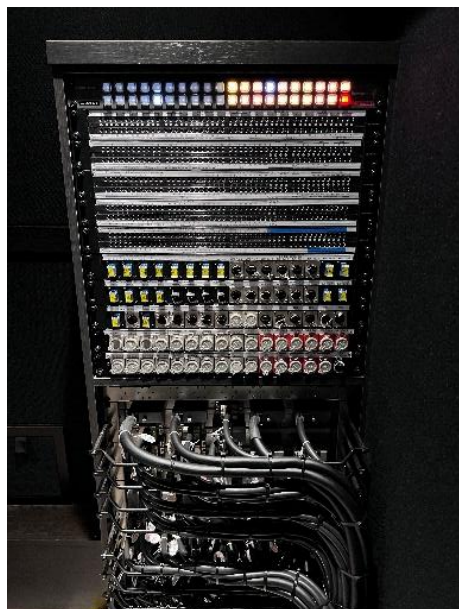

<マシンルーム>

